


BIFURCATED FAN



BIFURCATED FANS

This fan is mostly placed to exhaust or supply the air of corrosive nature or hazardous for the motor. In this the motor is not in the stream of air, remain protected from the particles available in the air.

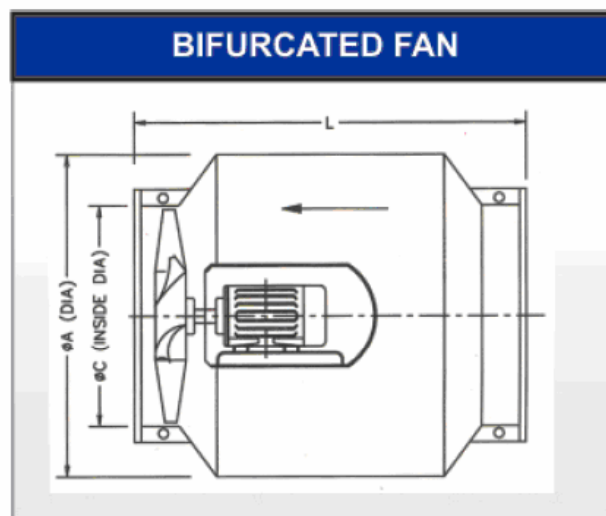

Fan Size: 800 to 1200 mm
Flow rates up to 100000 cmh
Pressures up to 600 Pa

SIZE	50	60	70	80	90	100	100	120
A	700	850	950	1080	1250	1350	1350	1550
C	500	600	700	800	900	1000	1000	1200
L	800	900	1000	1050	1200	1250	1250	1600

Application

This fan is mostly placed to exhaust or supply the air of corrosive or hazardous nature. The motor is not in the airflow stream, it thus prevents the motor from hazardous particles available in air.